GOD180 User Manual

1. To Our Customers:

Thank you very much for choosing our GOD180. Before using, please read this user's manual carefully. In order to check it later, please keep the manual properly after reading. If there's any questions, please feel free to contact our After-Sales Department.

2.Diagrammatic Sketch：

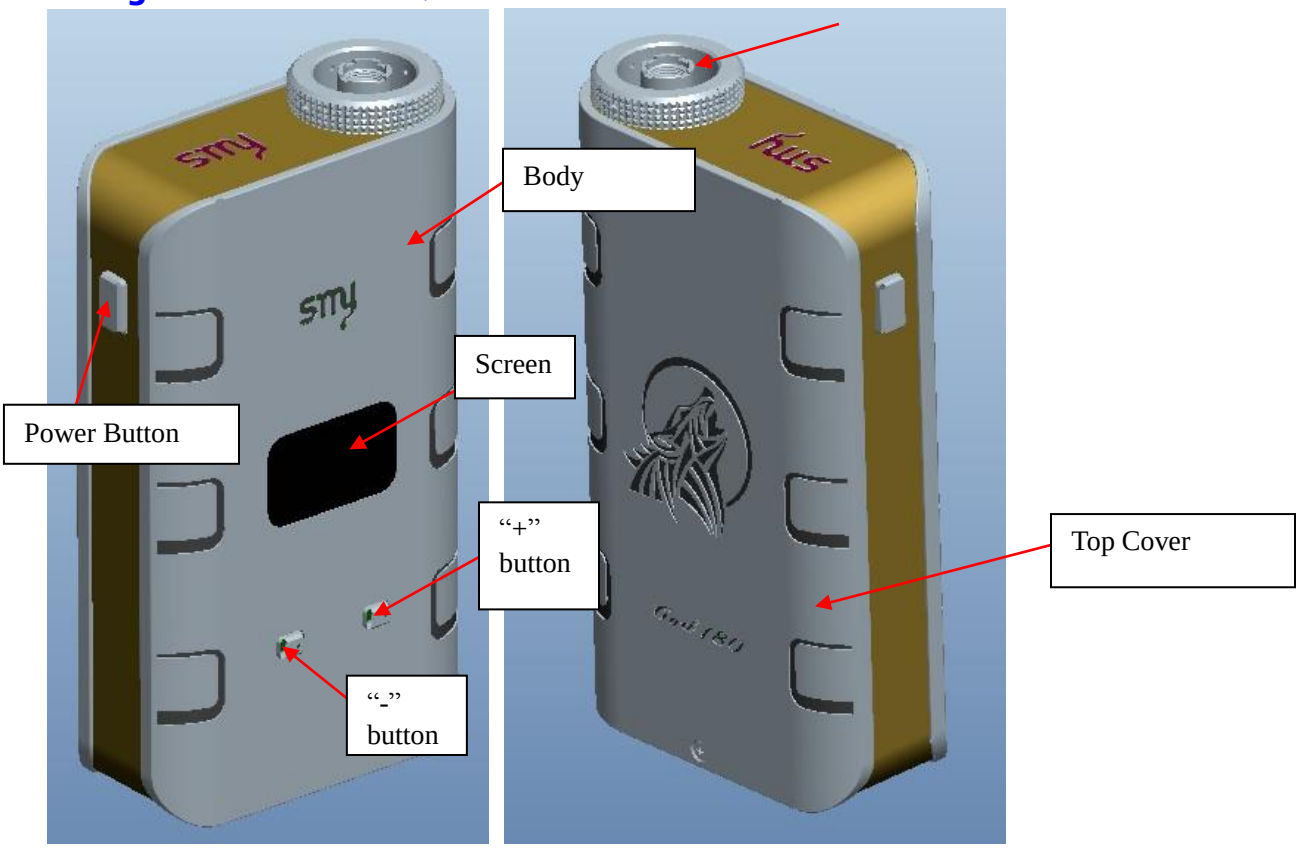

3.God180 standard configurations:

1 x God180 Body
1 x Cross screwdriver
1 x English user manual
1 x Certification

1 x Canvas Bag

4. Basic parameter:

God180 colors: Black/Blue/Red/Croci/Silver
God180 size: 119 X 69 X 30(mm)
God180 input voltage: DC 9.6V-12.6V
God180 output voltage: DC 1.5V-10.5V
God180 output power: 5W-180W

GOD180 hardware protection functions:
Protection of short circuit: When the current exceeds 30A, it would stop to work;
Protection of opposite connection: When the positive and negative poles of batteries are opposite, no working;
Protection of temperature control: It could monitor the IC's nearby temperature changing when vaping,if the temperature exceeds 80C,it would stop to work;
Protection of low voltage: When the battery capacity is lower than 9.6V, it would turn off automatically;

GOD180 software protection functions:
Two patterns can be supported, one is the normal mode and the other is super mode. The normal mod only support 5-80W.If you want to turn to the 81-180W, please make sure that the battery continuously discharge current could be exceeded 25A,if it does, then could open the super mod;
Protection of overtime: If the time of a cigarette was longer than the set time, it would stop working.

5. Display content & Function description:

Boot Animation:

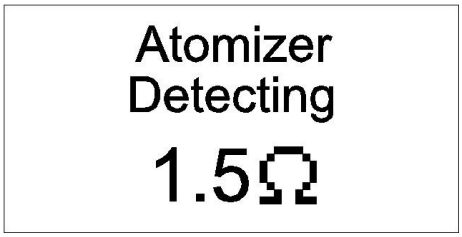

Initial Testing Resistance:

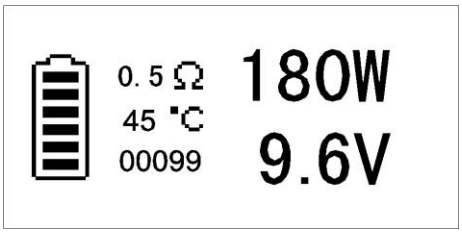

Normal Standby Screen:

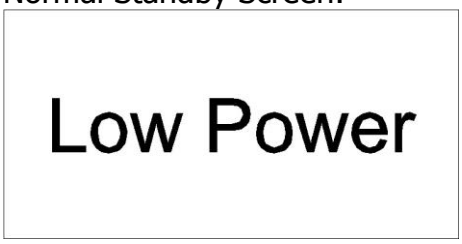

Low Power Display:

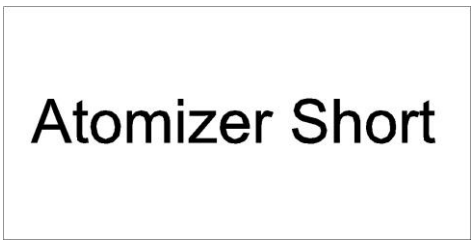

Display of Atomizer Short-circuit:

No Atomizer Display:

Overtime Protection Display:

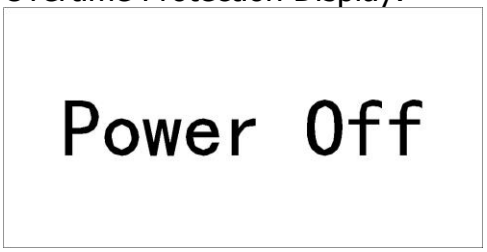

Power Off Display:

Normal Smoke Display under Manual Mode:

Normal Smoke Display under automatic mode:

Overtime Protection Setting

Choose "Overtime Protection" on Primary Menu

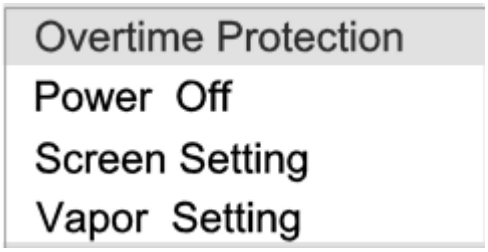

Press power button to enter the secondary menu

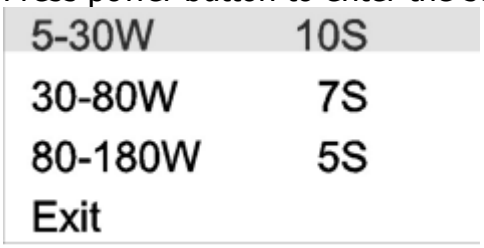

Use "+" "-" to choose the wattage rang, then press power button to select time setting on next sub-menu. Adjust time from 1s to 10s by "+" "-" button, then press power button back to previous menu. Next choose option "exit" and press power button to return to the primary menu.

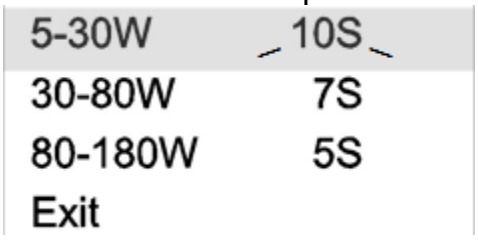

Power Off

Choose "Power Off" on Primary Menu, press power button to shut off the mod.

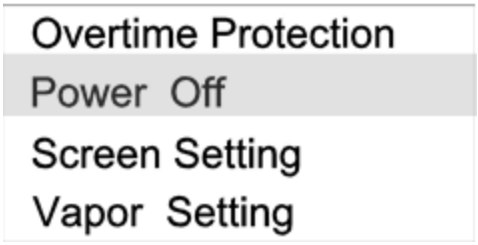

Screen Setting

Choose "Screen Setting" on Primary Menu, press power button to enter the secondary menu to set time for screen display

Press "+" "-" to adjust time from 1 minute to 99 minutes, then press power button to return to the primary menu.

Vapor Setting

Choose "Vapor Setting"on Primary Menu, Press power button to enter the secondary menu

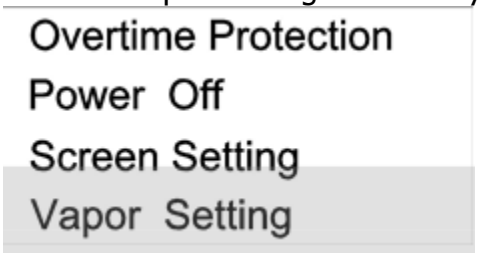

Use "+" "-" to choose vape mod,then press power button to select time setting on next sub-menu. Adjust vape time from 1s to 10s by "+" "-" button, Cycle count from 1 to 300 times. Press power button back to previous menu. Next choose option "exit" and press power button to return to the primary menu.

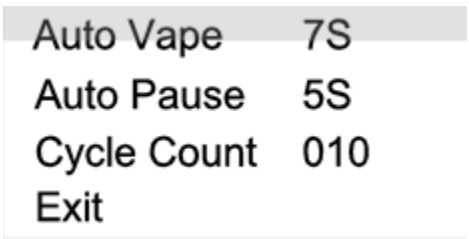

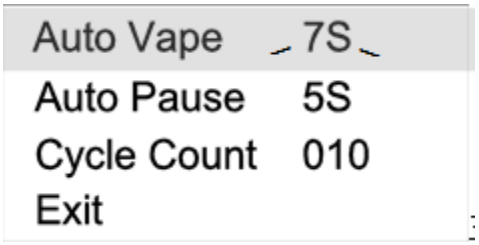

Exit Use "+" "-" to choose "Exit"mod and press it to return to the primary menu.

Puff Info

Choose "Puff Info" on Primary Menu, Press power button to enter the secondary menu

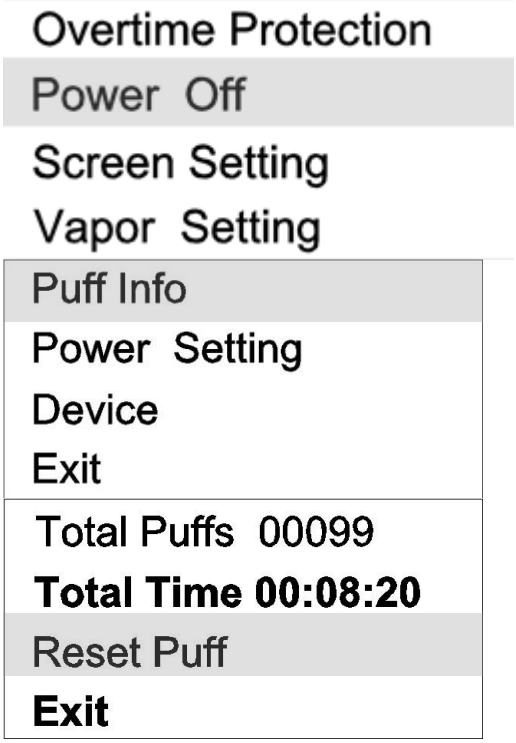

Secondary menu:

Total Puffs-Display the total puffs of smoking
Total Time-Display the total time of smoking
Reset Puff- Press +,-button to "Reset Puff" menu option, press the "Enter" button, clean away the smoking puffs and time
Exit- Press the +,-button to Exit menu option, press the Enter button to exit secondary menu

Power Setting -Select "Power Setting" option in main menu, press the Enter button to enter the **secondary menu:**

Fehler! Verweisquelle konnte nicht gefunden werden.

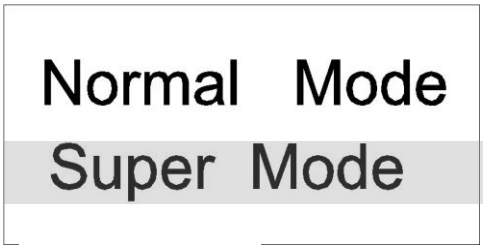

Secondary menu

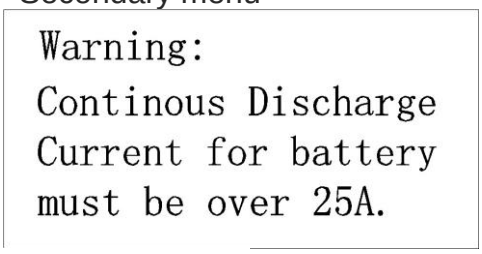

Three-level menu

Normal Mode -Normal mode, default option, power range 5-80W

Super Mode -Super mode, power range from 5w to 180W , with strict requirements on battery performance, suitable for enthusiasts, the screen will show the warning message after selecting this option

Device-Select "Device" option in main menu, press the Enter button to enter the secondary menu

Fehler! Verweisquelle konnte nicht gefunden werden.

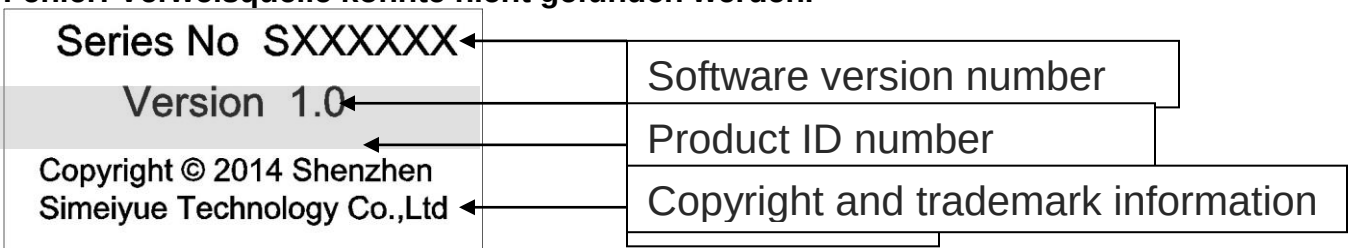

Exit -Select the "Exit" option in main menu, press the Enter button to exit the menu mode

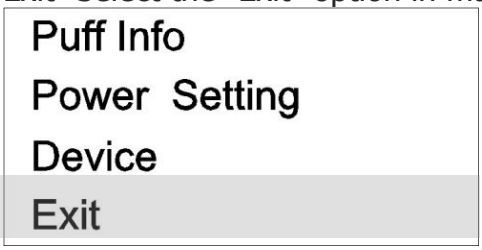

6. How to use:

6.1 Using cross screwdriver, back-out the GOD180 top cover's screw from counterclockwise and open the top cover;

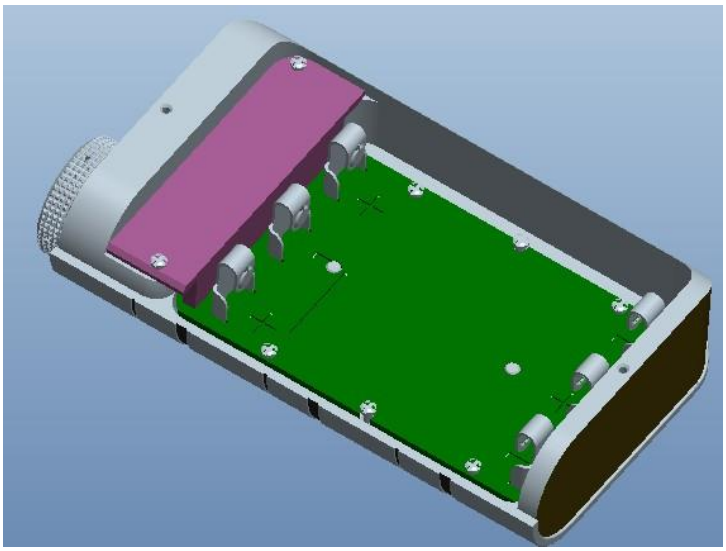

6.2.Install 3 pieces of 18650 batteries in the tube following the “+””-” as 6.2B

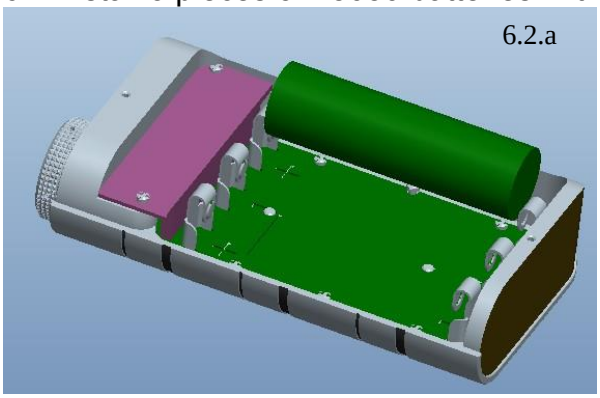

6.2.a

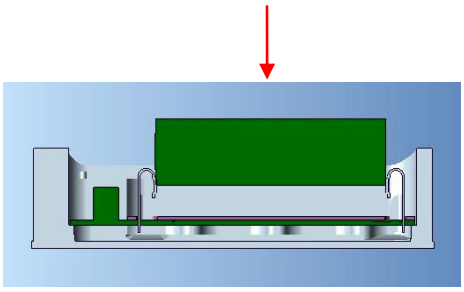

6.2.B

6.3 Lock the cover with cross screwdriver.

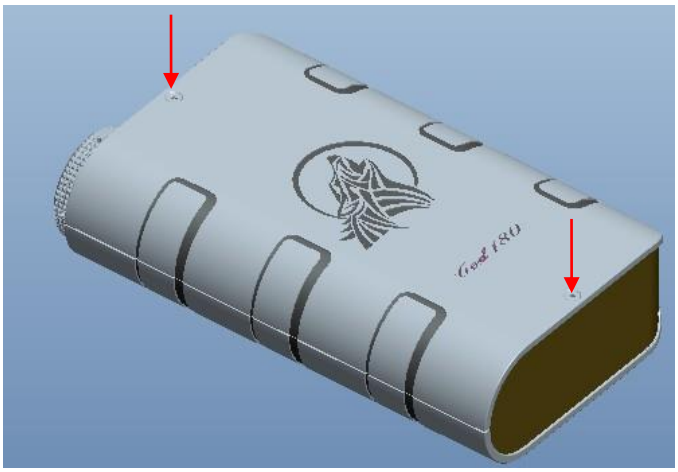

6.4 Connect the atomizer to the 510 thread clockwise.

6.5 Click the power button 5 times in 2 seconds, open GOD180 and it would show boot screen；

6.6 Click the power button 3 times in 2 seconds, enter the main menu mod to set the working parameter(Refer to the display content and function specification)；

6.7 Exit the main menu, display the standby screen and then adjust "+"/"-" to get the power you want;

6.8 Press the power button to vape.

Attentions:

1. GOD180 is the super power product, please make sure the heating coil you used could be stand the power value before using, in case of damaging the heating coil;
2. GOD180 needs to be matched with 18650 battery.80W-180W, battery's continuous discharge current must be greater than 25A to insure to output enough power, as well as reduce the battery's heating in the process of working.
3. Non-enthusiastic fan would be suggested to choose power form low to high first time, and keep eyes on the state of atomizer to avoid burning yourself by improper handling;